


# JVC

1.3 Megapixel 19" Monochrome Monitor

# ME195

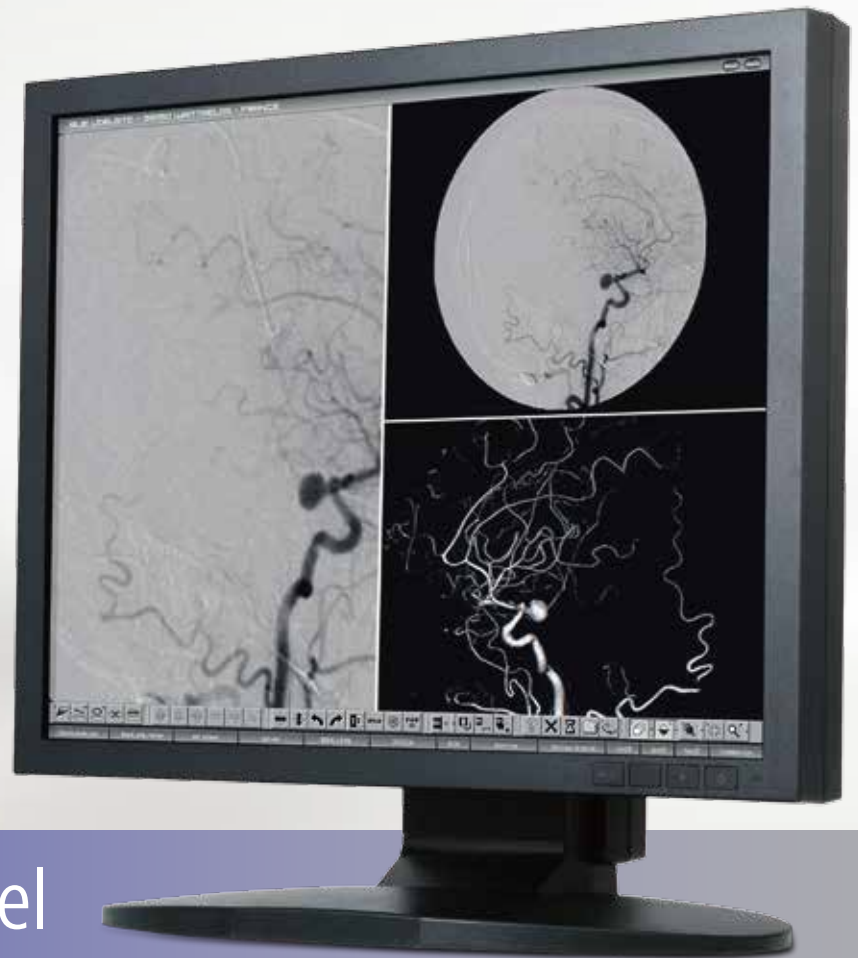

# 1.3 Megapixel Monochrome Monitor

A Proven Solution  
for Multi-Modality Imaging

19"

1400  
cd/m<sup>2</sup>

1000:1

12Bit  
LUT

Digital  
Analog  
Input


Analog  
Output

Calibration  
Function

LED  
Backlight

## Digital / Analog BNC / VGA Interface

You can daisy chain multiple ME195 via BNC input / output connectors. BNC buffer amplifier ensures same image quality for each ME195 in a daisy chain.

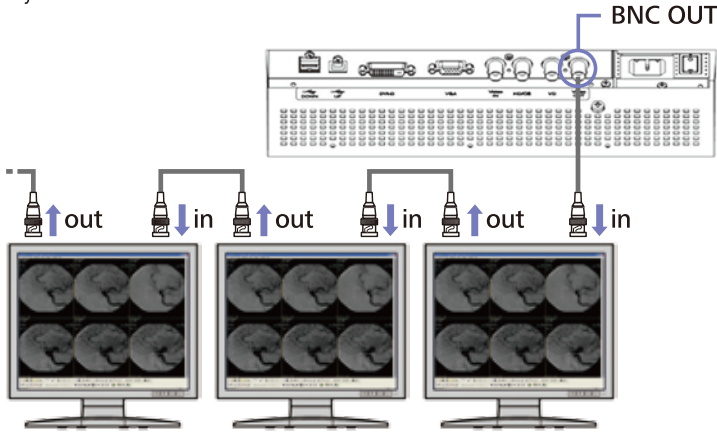

### – Timing Selection –

In order to support various special timings, multiple timings are preset in ME195.

## Luminance Stabilizing System

The Luminance sensor in back constantly monitors and accurately stabilizes luminance on the screen to optimize image quality.

## Built-in Power Supply

Internal power supply saves your work space by eliminating the need for an AC adapter.

## LED Backlight

LED Backlight system provides more stability in images and energy saving.

## Worldwide Medical Safety Standards


ME195 meets worldwide medical safety standards.

●“JVC” is a brand of medical and industrial monitors manufactured and sold by JVCKENWOOD Corporation. ●Company names and product names are the registered trademarks of the respective companies. ●Product specifications and appearance are subject to change without notice. ●Colors in photographs may differ from actual colors due to the printing process. ●Images on screens are simulated.


## Specifications

	<b>Model Name</b>	ME195
<b>LCD Panel</b>	<b>Technology</b>	19" monochrome TFT IPS technology
	<b>Display Area</b>	376.32 mm × 301.06 mm
	<b>Pixel Pitch</b>	0.294 mm × 0.294 mm
	<b>Contrast Ratio</b>	1000 : 1 (typ.)
	<b>Maximum Luminance</b>	1400 cd/m <sup>2</sup> (typ.), 450 cd/m <sup>2</sup> (calibrated)
<b>Visual Performance</b>	<b>Viewing Angle</b>	170° vertical and horizontal
	<b>Native Resolution</b>	VGA (640 × 480) ~ SXGA (1280 × 1024)
<b>Interface</b>	<b>Input Signal</b>	Digital : DVI-D (DVI 1.0 compliant) Analog : VGA D-Sub mini 15pin, BNC × 3(Video, HD/CS, VD)
	<b>Plug and Play</b>	DDC2B compliant
	<b>Output Signal</b>	Analog : BNC
<b>Input Power Supply</b>	<b>Input Power Supply</b>	100 V - 240 V 50 / 60 Hz
	<b>Maximum Power Consumption</b>	49 W (max.)
<b>Features</b>	<b>Calibration Control</b>	Luminance, Gamma (Optional Calibration Kit is required)
	<b>OSD Information Display</b>	Model name, Serial No., Total operating time, Calibration settings (Operating time since last calibration, Luminance, Gamma)
	<b>USB Hub</b>	USB Rev.2.0 compliant, Self-powered USB upstream connector (×1), USB downstream connector (×2)
	<b>Other Features</b>	Timing Selection (manual adjustment) *Analog signal only, LED indicator, Image Setting for each Interface, Image Zoom
<b>Approvals</b>		ANSI/AAMI E560601-1 (2005) + A1 (2012), CAN/CSA-C22.2 No. 60601-1 (2014), CE (EN60601-1, EN60601-1-2), FCC Part15 subpart B Class B, ICES-003-B, VCCI-B, RCM, J-Moss, CCC, RoHS
<b>Physical Characteristics</b>	<b>Dimensions (W × H × D)</b>	Landscape : 416.3 mm × 412.2 / 520.2 mm × 220 mm Portrait : 344 mm × 449.6 / 557.6 mm × 220 mm
	<b>Weight</b>	9.2 kg
	<b>Tilt Stand</b>	Tilt, Swivel, Portrait / Landscape
	<b>Mount</b>	VESA standard (100 mm × 100 mm)
	<b>Security Slot</b>	Anti-theft security slots (display and tilt stand)
	<b>Accessories</b>	Power cord, DVI cable, VGA cable, USB cable, User manual

## Dimensions (mm)

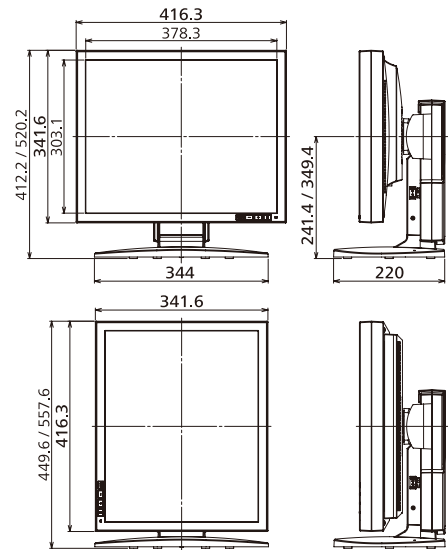

## Interface

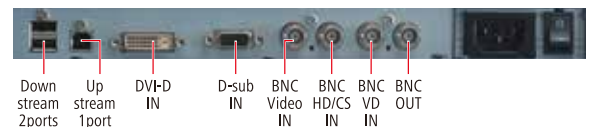

### Safety Precautions

- Please read the user's manual for safe and proper use.
- Do not expose the product to dust, moisture, steam, or oily smoke. It could cause fire, electric shock, or a failure.

Please contact our distributor below with inquiries and orders.

Healthcare Business Division  
JVCKENWOOD Corporation  
3-12, Moriya-cho, Kanagawa-ku, Yokohama-shi, Kanagawa, 221-0022, JAPAN  
TEL: +81-45-450-1908 FAX: +81-45-450-1926  
E mail : medical-display.j@jvckenwood.com  
JVC Healthcare Website : <http://healthcare.jvc.com/>